


**INSTALLATION INSTRUCTIONS**  
**Front High Clearance A-Arms:**  
**for Kawasaki Teryx4™**


Item	Description
A	Upper A-Arm, Passenger
B	Lower A-Arm, Passenger
C	Upper A-Arm, Driver
D	Lower A-Arm, Driver


2x   
**Brake Line Clips**

6x   
**Straight Fitting**

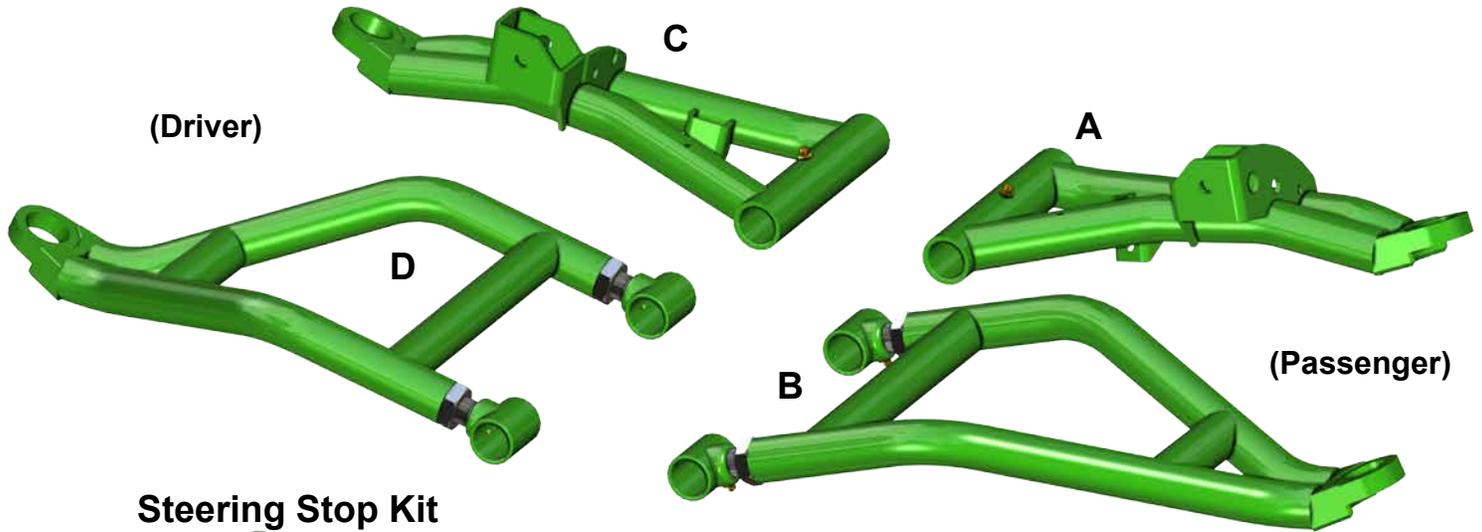

**Steering Stop Kit**

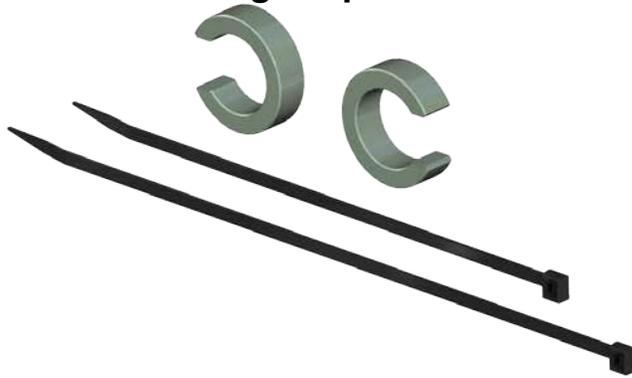

2x   
**M5-.80 x 13mm Lg. PHMS**

**Read instructions and view illustrations before beginning.**

**Need help with your installation?**

 [sales@superatv.com](mailto:sales@superatv.com)  [www.superatv.com](http://www.superatv.com)

 1-812-574-7777  8:00am - 9:00pm EST M-Th  
8:00am - 7:00pm EST Friday  
9:00am - 2:00pm EST Saturday

*Thank You*  
*For Choosing*  
**SUPERATV**.COM


**Liability Statement**  
SuperATV's® products are designed to best fit user's ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory or aftermarket parts will void any warranty provided by SuperATV® and is not recommended. SuperATV's® products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV® to verify that they will work together.

Although SuperATV® has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc. will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV® urges operators and occupants to wear a helmet and appropriate riding gear at all times.

By purchasing and installing SuperATV® products, user agrees that should damages occur, SuperATV® will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV®, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV®. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.

SuperATV® will warranty only parts provided by SuperATV®. Any damage or problems with OEM housings, bearings, seals, or other manufacturers' products will not be covered by SuperATV®. SuperATV® parts and products are not warranted if item was not installed properly, misused, or modified.

**Keep all components removed from machine**

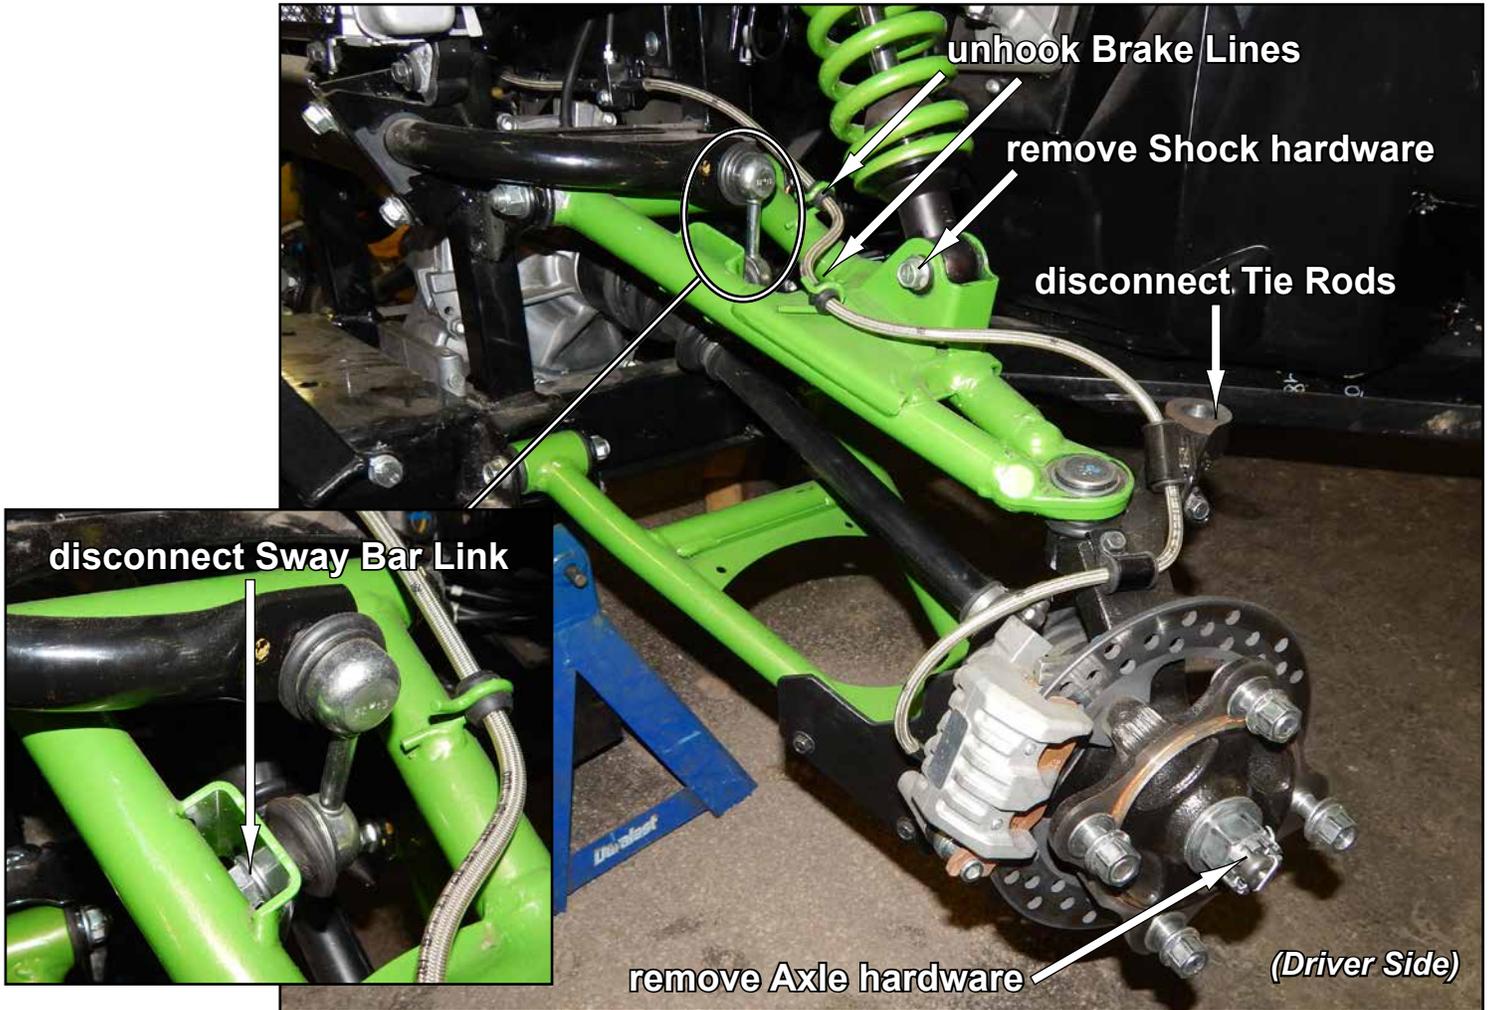

**Steering Stops installation:** *Note: Driver Side installation shown.*

1. Unclamp and slide Boot away from Steering Gear Box.
2. Install Steering Stop Bushing onto Shaft. See Figs. 1 - 1a.
3. Resecure Boot and repeat steps for opposite side.

*installation shown off machine for clarity only*


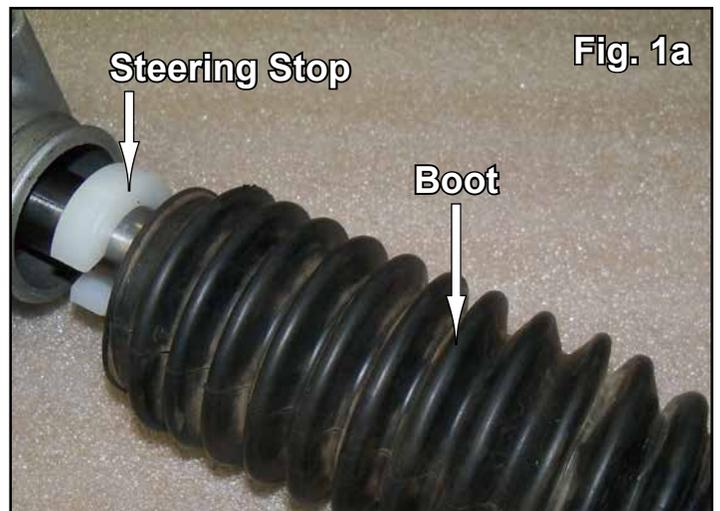



Fig. 1

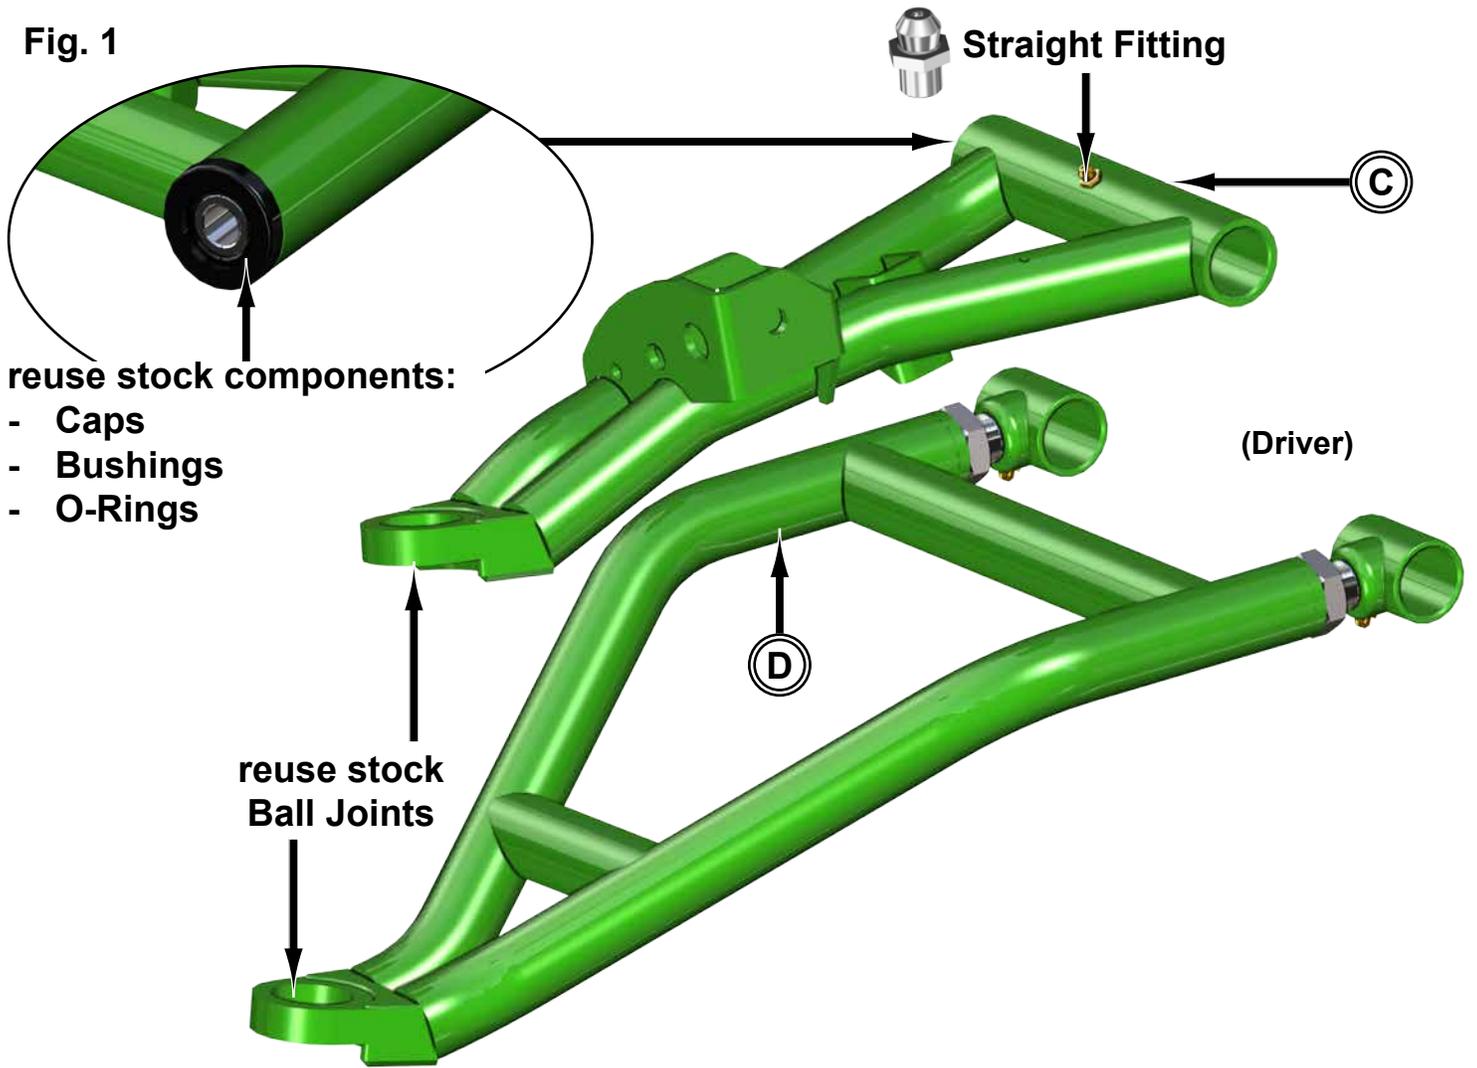

***Do not tighten hardware completely unless noted***

- Transfer stock Bushings, Caps, and O-Rings into new A-Arms. See Figs. 1 - 1a.
- Install provided Fittings into new A-Arms. See Figs. 1 - 1a.
- Adjust Pivot Blocks on Lower A-Arms (B)(D) to dimension shown in Fig. 1a.

Fig. 1a

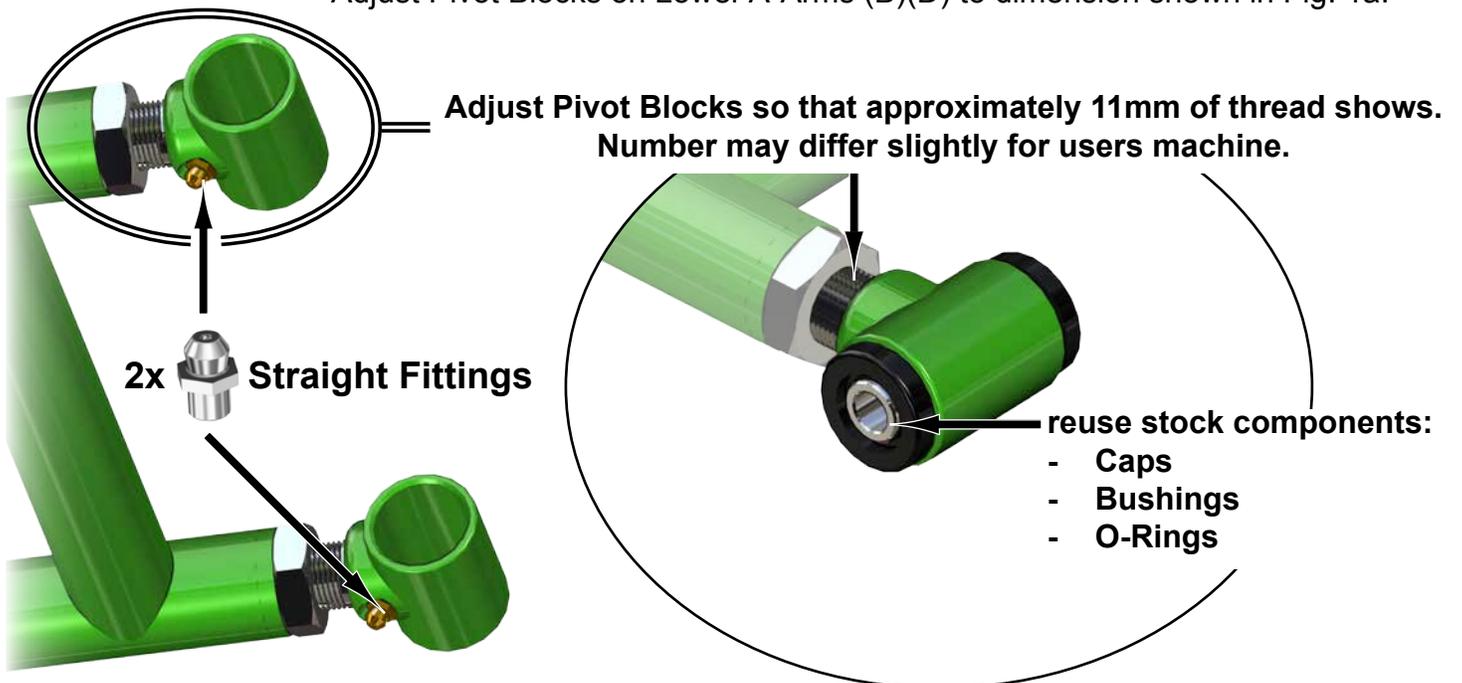

***Do not tighten hardware completely unless noted***

- Install A-Arms to Frame with stock hardware. SuperATV recommends using Loc-Tite on Nuts when installing. See Fig. 2.
- Reinstall necessary components with stock hardware; tighten all hardware completely.
- Secure Brake Lines to Upper A-Arms (A)(C) with Brake Line Clips, M6 hardware, and stock Brake Line components. See Fig. 2.

